


Führungssäule mit Zentrierbund

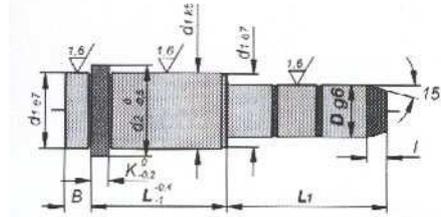

AZ 00

Werkstoff: 1.7139 ca. 700HV


Sonderabmessungen auf Anfrage

Bestellbeispiel:
4 Stck. AZ00/12/10x25

B	K	d ₁	d ₂	l	D	L	L ₁	€
3	3	14	16	4	9/10	12	25	4,93
							45	6,53
							65	8,34
3	3	14	16	4	9/10	17	20	4,93
							25	5,23
							30	5,85
							35	6,15
							50	7,82
							55	8,04
							70	8,80
							75	9,33
3	3	14	16	4	9/10	22	25	5,85
							35	6,54
							55	8,34
							75	9,33
							95	10,24
3	3	14	16	4	9/10	27	20	6,22
							25	6,37
							30	6,53
							45	7,74
							50	8,34
							70	9,33
							90	10,24
3	3	14	16	4	9/10	36	25	6,90
							35	7,51
							45	8,34
							65	9,48
							85	10,40
3	3	14	16	4	9/10	46	30	8,34
							35	8,57
							45	9,03
							70	10,24
3	3	14	16	4	9/10	56	35	9,03
							60	10,24

B	K	d ₁	d ₂	l	D	L	L ₁	€
9	6	20	25	5	14/15	17	35	6,53
							55	8,64
							75	10,85
							95	12,52
9	6	20	25	5	14/15	22	30	6,67
							50	8,64
							70	10,85
							90	12,52
							110	14,72
							125	16,54
							150	19,20
9	6	20	25	5	14/15	27	30	6,98
							45	8,64
							65	10,85
							85	12,52
							105	14,72
							125	17,23
							145	19,20
							165	23,36
9	6	20	25	5	14/15	36	35	8,64
							55	10,85
							75	12,52
							95	14,72
							125	18,13
							155	23,36
9	6	20	25	5	14/15	46	35	9,33
							45	10,85
							65	12,52
							85	14,72
							105	17,23
							125	19,20
							145	23,36
9	6	20	25	5	14/15	56	35	10,85
							55	12,52
							75	14,72
							95	17,23
							135	23,36

Führungssäule mit Zentrierbund

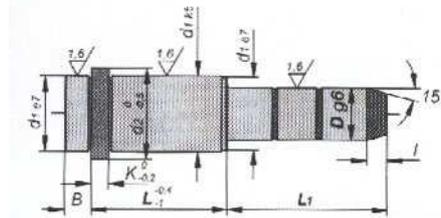

AZ 00

Werkstoff: 1.7139 ca. 700 HV

Sonderabmessungen auf Anfrage


Bestellbeispiel:
4 Stck. AZ00/12/10x25

B	K	d ₁	d ₂	l	D	L	L ₁	€
9	6	20	25	5	14/15	66	55	13,73
							65	14,72
							95	18,13
							125	23,36
9	6	20	25	5	14/15	76	55	14,72
							95	19,20
9	6	20	25	5	14/15	86	55	17,07
							95	21,25
9	6	20	25	5	14/15	96	55	17,23
							95	23,36
9	6	20	25	5	14/15	116	75	23,36
9	6	26	31	7	18/20	17	35	8,43
							55	10,10
							75	12,59
							120	18,06
9	6	26	31	7	18/20	22	35	8,73
							45	9,56
							65	12,06
							85	14,26
							115	18,06
9	6	26	31	7	18/20	27	35	9,33
							45	10,10
							65	12,59
							85	15,02
							105	17,37
							125	19,88
							165	24,27
							225	31,41
							245	34,21

B	K	d ₁	d ₂	l	D	L	L ₁	€
9	6	26	31	7	18/20	36	35	10,10
							55	12,59
							75	15,02
							95	17,37
							115	19,88
							135	21,92
							165	25,19
							225	32,47
							255	36,95
9	6	26	31	7	18/20	46	35	11,31
							45	12,59
							65	15,02
							85	17,37
							105	19,88
							135	23,07
							165	26,25
							245	36,95
9	6	26	31	7	18/20	56	35	12,59
							55	15,02
							75	17,37
							95	19,88
							155	26,25
9	6	26	31	7	18/20	66	35	13,89
							55	16,39
							75	18,67
							95	20,64
							145	26,25
9	6	26	31	7	18/20	76	55	17,37
							75	19,88
							95	21,92
							135	26,25
9	6	26	31	7	18/20	86	55	18,97
							75	20,64
							95	23,06
							125	26,25

Führungssäule mit Zentrierbund

AZ 00

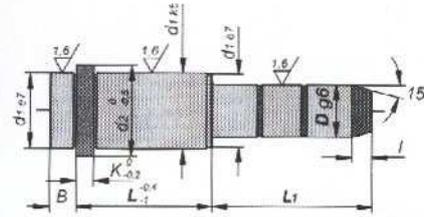

Werkstoff: 1.7139 ca. 700 HV


Sonderabmessungen auf Anfrage

Bestellbeispiel:
4 Stck. AZ00/96/20x55

B	K	d ₁	d ₂	l	D	L	L ₁	€
9	6	26	31	7	18/20	96	55	19,88
							95	24,27
9	6	26	31	7	18/20	116	75	24,27
							115	29,21
9	6	26	31	7	18/20	136	135	34,21
9	6	30	35	7	22/24	17	35	10,54
							55	12,14
							75	14,95
9	6	30	35	7	22/24	22	35	11,00
							55	12,89
							75	15,63
							105	19,72
							130	23,22
9	6	30	35	7	22/24	27	35	11,45
							45	12,14
							65	14,95
							85	17,37
							105	20,41
							125	23,22
							165	29,44
							205	34,21
							245	38,31
							285	41,66
9	6	30	35	7	22/24	36	35	12,14
							55	14,95
							75	17,37
							95	20,41
							115	23,22
							135	26,17
							165	30,58
							205	35,51
							245	39,15
							285	42,49

B	K	d ₁	d ₂	l	D	L	L ₁	€
9	6	30	35	7	22/24	46	35	14,49
							45	14,95
							65	17,37
							85	20,41
							105	23,22
							125	26,25
							165	32,24
							205	36,95
9	6	30	35	7	22/24	56	35	14,95
							55	17,37
							75	20,41
							95	23,22
							115	26,25
							165	33,30
							205	37,25
9	6	30	35	7	22/24	66	35	17,23
							55	19,12
							75	21,92
							95	24,59
							155	33,30
9	6	30	35	7	22/24	76	55	20,41
							75	23,22
							95	26,25
							115	29,44
							145	33,30
9	6	30	35	7	22/24	86	55	21,92
							75	24,59
							95	28,07
							135	33,30
9	6	30	35	7	22/24	96	55	23,22
							75	26,25
							95	29,44
							125	33,30

Führungssäule mit Zentrierbund

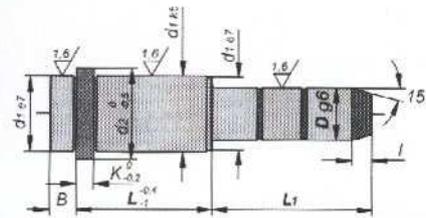

AZ 00

Werkstoff: 1.7139 ca. 700 HV

Sonderabmessungen auf Anfrage

Bestellbeispiel:
4 Stck. AZ00/96/20x55


B	K	d ₁	d ₂	l	D	L	L ₁	€
9	6	30	35	7	22/24	116	75	29,44
							115	34,21
							155	38,31
9	6	30	35	7	22/24	136	95	34,21
							135	38,31
9	6	30	35	7	22/24	156	155	41,66
9	6	42	47	7	30/32	27	45	12,52
							65	15,25
							105	20,56
							165	29,21
							185	32,24
							245	39,22
							285	42,26
9	6	42	47	7	30/32	36	55	15,25
							75	17,53
							95	20,57
							115	23,59
							155	29,21
							245	39,76
							285	43,32
9	6	42	47	7	30/32	46	45	15,25
							65	17,53
							85	20,56
							105	23,59
							125	26,33
							165	32,24
							245	40,52
							285	44,08
9	6	42	47	7	30/32	56	55	17,53
							75	20,56
							95	23,59
							115	26,33
							135	29,21
							175	34,74
							245	41,35
							295	44,77

B	K	d ₁	d ₂	l	D	L	L ₁	€
9	6	42	47	7	30/32	66	55	19,20
							75	22,08
							95	24,73
							115	27,54
							135	30,28
							175	35,81
							245	40,52
							295	44,99
9	6	42	47	7	30/32	76	55	20,56
							75	23,59
							95	26,33
							115	29,21
							155	34,74
							225	41,35
9	6	42	47	7	30/32	86	55	22,08
							75	24,73
							95	27,54
							115	30,28
							155	35,81
							225	40,52
9	6	42	47	7	30/32	96	55	23,59
							75	26,33
							95	29,21
							115	32,24
							155	37,25
							205	41,35
9	6	42	47	7	30/32	116	75	29,74
							115	34,74
							155	39,22
9	6	42	47	7	30/32	136	95	34,74
							115	37,25
							155	40,52
9	6	42	47	7	30/32	156	115	39,22
							155	43,33



Führungssäule mit Zentrierbund

AZ 00

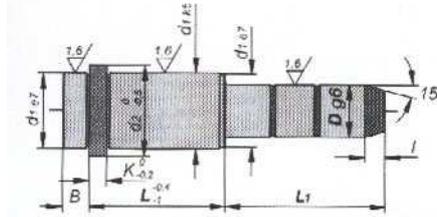

Werkstoff: 1.7139 ca. 700HV

Sonderabmessungen auf Anfrage

Bestellbeispiel:

4 Stck. AZ00/196/42x165

B	K	d ₁	d ₂	l	D	L	L ₁	€
9	6	42	47	7	30/32	196	155	44,77
							195	46,35
12	10	54	59	10	40/42	46	95	32,77
							165	46,35
12	10	54	59	10	40/42	56	75	30,80
							115	38,31
							155	46,35
							195	55,53
12	10	54	59	10	40/42	66	75	32,77
							135	44,45
12	10	54	59	10	40/42	76	75	34,74
							115	42,26
							175	55,53
12	10	54	59	10	40/42	86	75	36,34
							135	48,56
12	10	54	59	10	40/42	96	75	38,31
							115	46,35
							155	55,53
12	10	54	59	10	40/42	116	95	46,35
							135	55,53
							195	69,49
12	10	54	59	10	40/42	136	95	51,06
							135	60,54
							215	81,63
12	10	54	59	10	40/42	156	115	57,73
							155	69,42
							215	86,11

B	K	d ₁	d ₂	l	D	L	L ₁	€
12	10	54	59	10	40/42	196	155	81,63
							195	93,24
							235	107,66
12	10	54	59	10	40/42	246	165	100,98
							245	119,34